


DROP BOWL
MOUNTING
POSITION

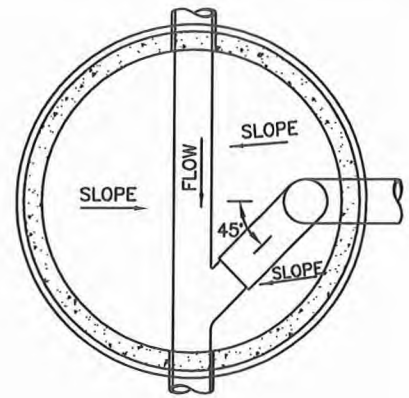

INSIDE DROP - PLAN

RELINER® INSIDE DROP
BOWL SECURED WITH
STAINLESS STEEL
BOLTS 316 GRADE

TRIM PIPE TO 2" MAX.
V NOTCH BOTTOM EDGE

FERNCO FLEXIBLE
COUPLING OR EQUAL

COMPRESSION
COUPLING
MORTAR

RELINER® STAINLESS
STEEL STRAPS OR
EQUAL. SECURE TO
STRUCTURE WITH
2 STAINLESS STEEL
BOLTS 316 GRADE. STRAP
AT 4' INTERVALS (MIN. OF 2)

PVC SEWER PIPE

GLUE FITTING
BELL & SPIGOT
SWEEP ELBOW
EMBEDDED IN
CONC. AT 45°
W/ SEWER FLOW

NOTES:

1. ALL INSIDE DROP CONNECTIONS FOR SERVICES AND COLLECTOR SEWERS SHALL USE THE DROP BOWL AS PRODUCED BY:
RELINER-DURAN, INC.
53 MT. ARCHER RD,
LYME, CT 06371
(860)434-0277 FAX: (860)434-3195
2. SECURE DROP PIPE TO MANHOLE WALL WITH RELINER-DURAN, INC STAINLESS STEEL ADJUSTABLE CLAMPING BRACKETS.



CITY OF EDINA
ENGINEERING
& PUBLIC
WORKS
DEPTS.

SANITARY DROP MANHOLE (LOW-PROFILE INSIDE DROP)

Chad A. Miller
APPROVED: CITY ENGINEER

REVISED:
03-14
STANDARD
PLATE
206